



Opportunities in Opportunistic Computing

Mohan Kumar

The University of Texas at Arlington

- *Students: Sagar Tamhane and Umair Sadiq*
- *Collaborators: Marco Conti and Andrea Passarella of IIT, CNR, Pisa Italy*

Funding from NSF Award Number: 0834493



Organization

Background and Motivation

Distinctions

Opportunistic Computing

Contacts, Paths

Issues and challenges

- ***Can we do distributed computing in an opportunistic networking environment?***

Applications



Opportunistic contact

Capacity of the contact

- Time duration of the contact
- Available bandwidth

Frequency of contacts



Two devices are within communication range

Security and privacy

- Trust between the two devices/users
- Secure communication channel

Resources on each device



What is opportunistic computing?

More than exchange of packets/bundles

- *Content distribution and information management*
- *Remote task execution*
- *Cyber foraging*
- *Resource sharing*
- *Service composition*
- *Trust and authentication*
- ***Enabling pervasive applications***
- ***Anywhere, anyhow, but later***



Background

Wireless ad hoc networking

- *Novel algorithms and schemes developed*
- *Cooperation in the absence of infrastructure*

Pervasive computing

- *Context-aware services to users/applications*
- *Smart environments*

Distributed resources

- *Mobile devices possess myriad of resources*

Opportunistic communications

- *Exchange of packets/bundles*

Social networks and computing

- *Exploit gregarious nature of humans*



Computing Paradigms

Computing – 1940s ...

- *Uniprocessor architectures, limited applications*

Parallel Computing - 1970s ...

- *Multiprocessor systems, computationally intensive tasks*

Distributed Computing – 1980s ...

- *Collaboration in networked systems, Resource Sharing, Business applications, the Internet, WWW*

Mobile Computing – Mid 90s ...

- *Anytime anywhere computing*

Grid Computing – 90s ...

- *Effective utilization of resources*

Pervasive Computing – 00s ...

- *User centric, quality of life,*

Opportunistic Computing – Mid 00s ...

- *Adapting to users' social behavior, ...*



Fading Distinctions

Servers and clients

- *Distributed systems, P2P systems*
- *Cost and time*

Producers and consumers of information

- *Users are producers of information as well*
 - *User with a cell phone camera*

Service providers and consumers

- *Resources on user devices can be exploited*

Resourceful and resource-poor entities

- *Servers, desktops, laptops, mobile phones*
- *Grid computing*
- *Cyber foraging*



Window of Opportunity

Time is ripe

- *Mobile ad hoc networks*
- *Wireless communication technologies*
- *Pervasive computing and smart environments*
- *Sensor systems*
- *User mobility and social behavior*
- *Distributed resources*



Need for Opportunistic Computing

Opportunistic connections and paths exist

Resources are distributed in challenged and highly dynamic environments

Cost effective

- *Communicate, distribute when needed*

User generated information/events

- *Anywhere, anytime*
- *Large*
- *Frequent*

Automatic filtering

- *Limited buffer space*
- *Purge unwanted data*

User-centric applications

- *Expensive for users to adapt their mobility*
- *Limited user attention*

Opportunistic computing can be Green

- *Servers, routers, communication channels are not used*
- **Selective Networking**
- **Energy savings**



Delay/disruption tolerant applications

Soft-real time applications

- *Vehicle-to-vehicle data dissemination*
- *Traffic monitoring*
- *Collaboration among robots*

Sender-receiver disconnection tolerant

- *Document transfers*
- *Remote task execution*

Non-critical monitoring applications

- *Tagging animals*
- *Dissemination of events*

Email, FTP, message passing



MANETs Vs. Opportunistic Networks

Message forwarding in MANETs

- *High density and high mobility of nodes*
 - Maintenance of end-to-end paths
 - *Knowledge acquisition is expensive*
- *Energy consumption is high*
- *Low density and low mobility*
 - Low reachability
 - Low reliability
 - High congestion due to bottlenecks

In ONs

- *Delayed*
- *Opportunistic*
- *Possibly low cost*



Delay/Disruption Tolerant Networks

Terms used interchangeably

In ONs

- *Each node acts as a gateway*



What are DTNs?

Delayed tolerant networks

- *Tolerate delays*
- *Store and forward principle*
- *Persistent storage at (DTN) network routers/gateways*

Characterized by

- *Long delay paths*
- *Frequent network partitions*
- *Intermittent connectivity*
- *Asymmetric data rates*
- *Varying message propagation rates*
- *Need for buffers*
- *No end-to-end connectivity*

V. Cerf et. al., "Delay Tolerant Network Architecture", [draft-irtf-dtnrg-arch-05.txt](#), September 2006
K. Fall, "[A Delay-Tolerant Network Architecture for Challenged Internets](#)", IRB-TR-03-003, Feb., 2003
F.Warthman, "DTN Tutorial", May 2003



Examples

- DakNet project [Pen04] uses busses equipped with an access point to collect and deliver data packets from/to villages on a route.
- Wizzy project [Wiz] uses digital couriers to disseminate info (from the www) to rural schools.
- In [Sma03], the authors describe a project where whales are tagged with a sensor that records positional information.
- ZebraNet project [Jua02] track zebras using a similar concept, but collects recorded data using a jeep.
 - *oceanographers tag seals to obtain a better reading of ocean temperature.*


[Pen04] A. Pentland and R. Fletcher (2004), **DakNet: Rethinking Connectivity in Developing Nations**, IEEE Computer, 37(1), pg 78-88, January, 2004.

[Wiz] Wizzy Project. <http://www.wizzy.org.za/>

[Sma03] T. Small and Z. Haas (2003) **The Shared Wireless Infostation Model – A new Ad-Hoc Networking Paradigm (or Where there is a Whale, there is a Way)**, ACM MobiHOC'03, Annapolis, Maryland, June 1-3, 2003.

[Jua02] P. Juang, H. Oki, Y. Tong, M. Martonosi, L-S. Peh and D. Rubenstein (2002) **Energy-Efficient Computing for Wildlife Tracking: Design Tradeoffs and Early Experiences with ZebraNet**, ACM ASPLOS'02, San Jose, CA, USA.



DTN Architecture

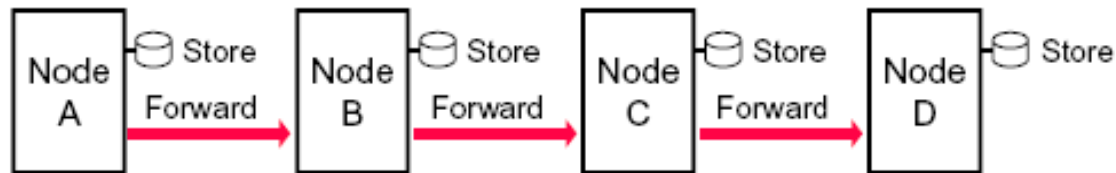


- Overlay network above the transport layer
- Aggregate of message called a bundle used to transfer data from one node to next
- Routers that handle bundles are called “bundle forwarders” or DTN gateways
- DTN forwarders store and forward data moving it from source to destination

DTN Architecture

- A new protocol layer called bundle layer is overlaid on region-specific lower layers
- Applications can communicate across different regions using the bundle layer
- Single bundle-layer protocol is used across all networks of DTN

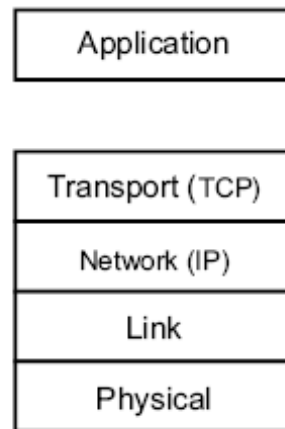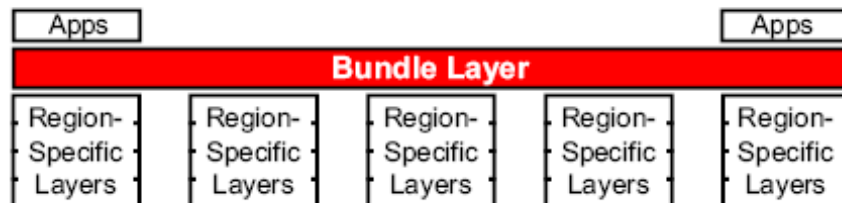

Internet Layers

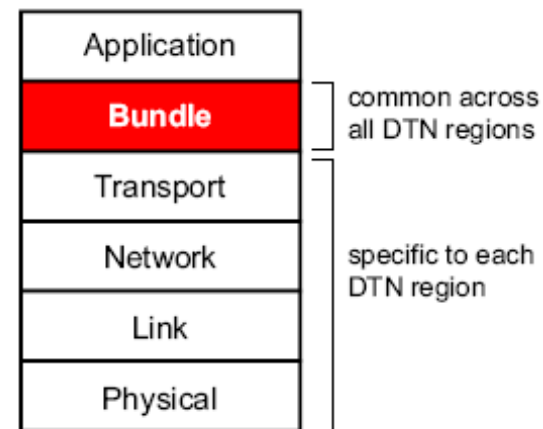

DTN Layers



Distributed Computing

Heterogeneity

- *CORBA, RMI, Mobile code*

Resource sharing

- *Wide and well developed*

Security

- *Partial*

Scalability

- *The Internet*

Failure handling

- *Partial success*

Concurrency

- *Grid computing, well developed*

Transparency

- *Minimal user effort*

Openness

- *Modular, portable software*

M. Colouris et al, Distributed Computing: Concepts and Design, 4th Edition 2005, Addison Wesley,



Pervasive Computing

Proactivity and transparency

- *Delays, resource utilization, unobtrusive services*

Heterogeneity and interoperability

- *Unevenness, incompatibility, h/w, s/w, communication channel*

Location awareness and mobility

- *Handoff- vertical/horizontal, data dissemination/acquisition*

Authentication and security

- *Privacy vs. services, cost, agents, active networks, availability*

Smart environments

- *Deployment, Interference*


Opportunistic Computing

Tolerate intermittent connections and delays

Mask unevenness, Conserve energy, Manage information

M. Satyanarayanan, "Pervasive Computing: Vision and Challenges," IEEE Personal Computing, August 2001.

Opportunistic Computing

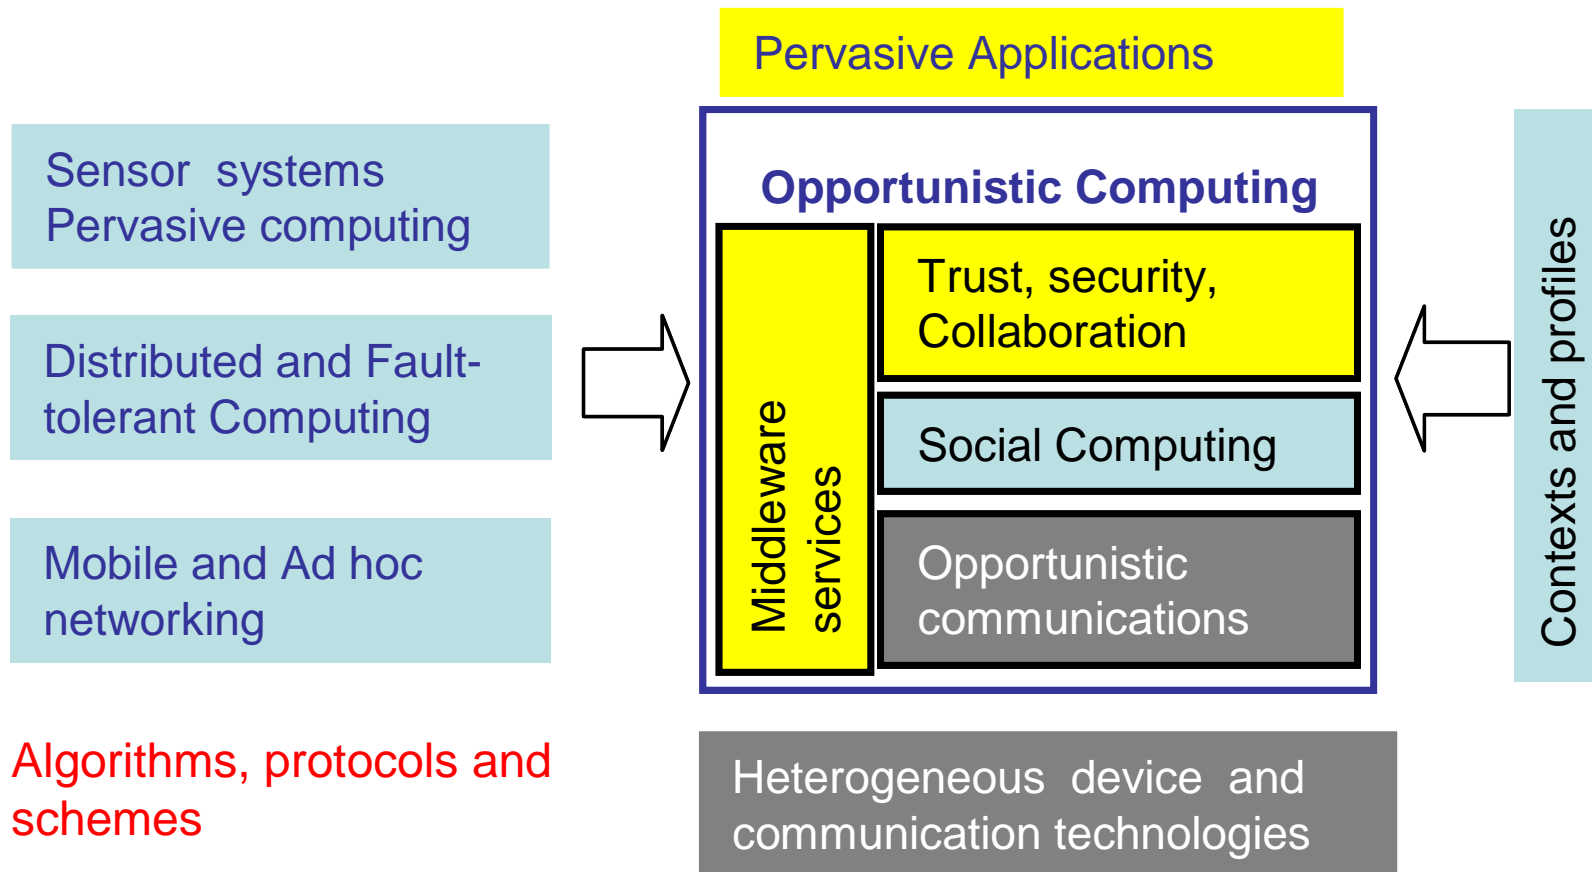



Opportunistic contacts

Cell phones

- *4 Billion users worldwide*
 - Internet Population – 1.3 Billion (2008)
 - *Global annual growth – 22%*
 - *One in three persons carry a cell phone*
 - More than 1 billion opportunistic contacts at any given time
 - *Not counting sensors and RFID Tags*

10 billion ARM processors

- *In cell phones and other mobile devices*

Millions of vehicles on the road

- *Many equipped with cameras, computing devices, GPS systems*

In a typical downtown (CBD) area

- *O(100) street cameras*
- *O(1000) user cameras*
- *O(1000) user devices, laptops, PDAs*
- *O(100) desktops, infoservers*

<http://www.cnet.com>; <http://infoplease.com>; <http://arm.com/products>



Potential

One Terra opportunistic contacts

- *Each processor*
 - 100 MIPS
 - 1K distributed tasks per second
- *Each contact*
 - 200 kb/s (conservative)
 - 5 seconds
- *At any time instant*
 - 1 Peta distributed tasks
 - 1 Peta bytes of data exchange



Challenges

Low mobility and low density areas

Low contact times

Noisy channels



Hard-real time applications

Trust and security

Information overload

- *Aggressive routing*
- *Redundant information*

Opportunistic path

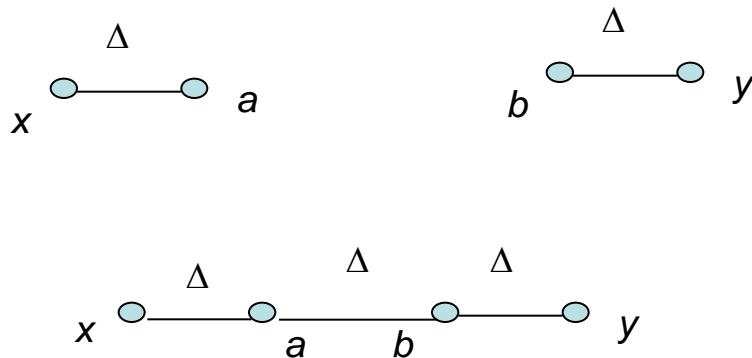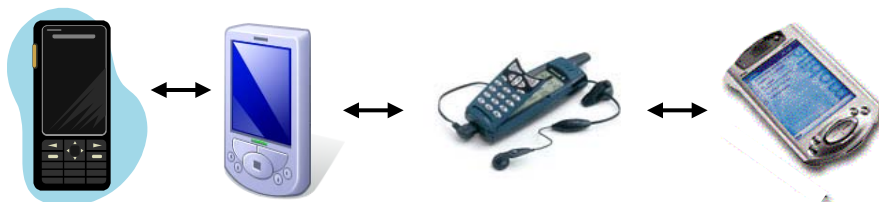

Cooperation and collaboration

Comprises multiple opportunistic contacts




Path delay

- *number of contacts*
- Δ is the expected delay for each contact

Intermediate nodes

- *Store and forward*
- *Possess adequate buffer space*

Opportunistic paths

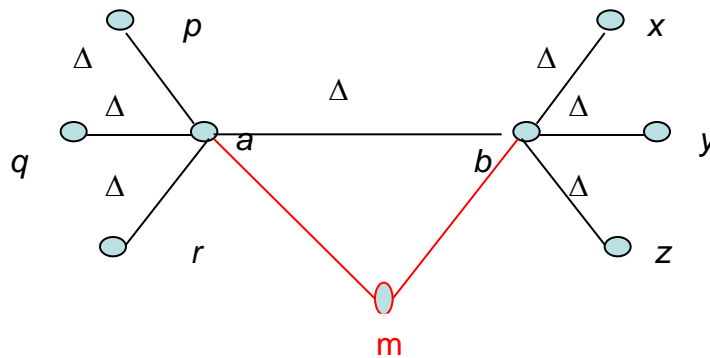

Challenge: Establishing reliable path for cooperation and collaboration



Routing and Forwarding

Dissemination-based and context-based

- *Dissemination*
 - Message is forwarded everywhere
 - Resource intensive
 - *Epidemic routing [Vahdat00]*
 - *Controlled probabilistic routing [Oikonomou07]*
 - *PROPHET Coding[Lindgren03]*
 - *Network Coding[Widmer05]*
- *Context*
 - Identify next hop based on context
 - *Context-aware routing[Musolesi05]*
 - *Mobyspace routing[Leguay06]*
 - *HiBOp[Boldrini07]*

Challenge: Manage information efficiently

Controlled dissemination – what you want, where you want



Social networking

Social behavior

- *Mobility models*
- *Routing Schemes*
- *Forwarding decisions*

Social structures

- *Cooperate and communicate*
- *Smart pervasive environments*

Socialnets vision

- *Understand*
 - Human relationship/connectivity
- *Model*
- *Exploit*

Challenge:

- Use social models to aid
- Efficient information management, trust and collaboration



Social networking

Inter-group

- *hierarchical*
 - The message packets move from group to group, rather than node to node
 - *Hierarchical data movement*
 - **Worst case – Logarithmic**

Intra-group

- *Constant number of hops*


Delayed



Middleware

Mask disconnections, delays

Provide uniform view of the system

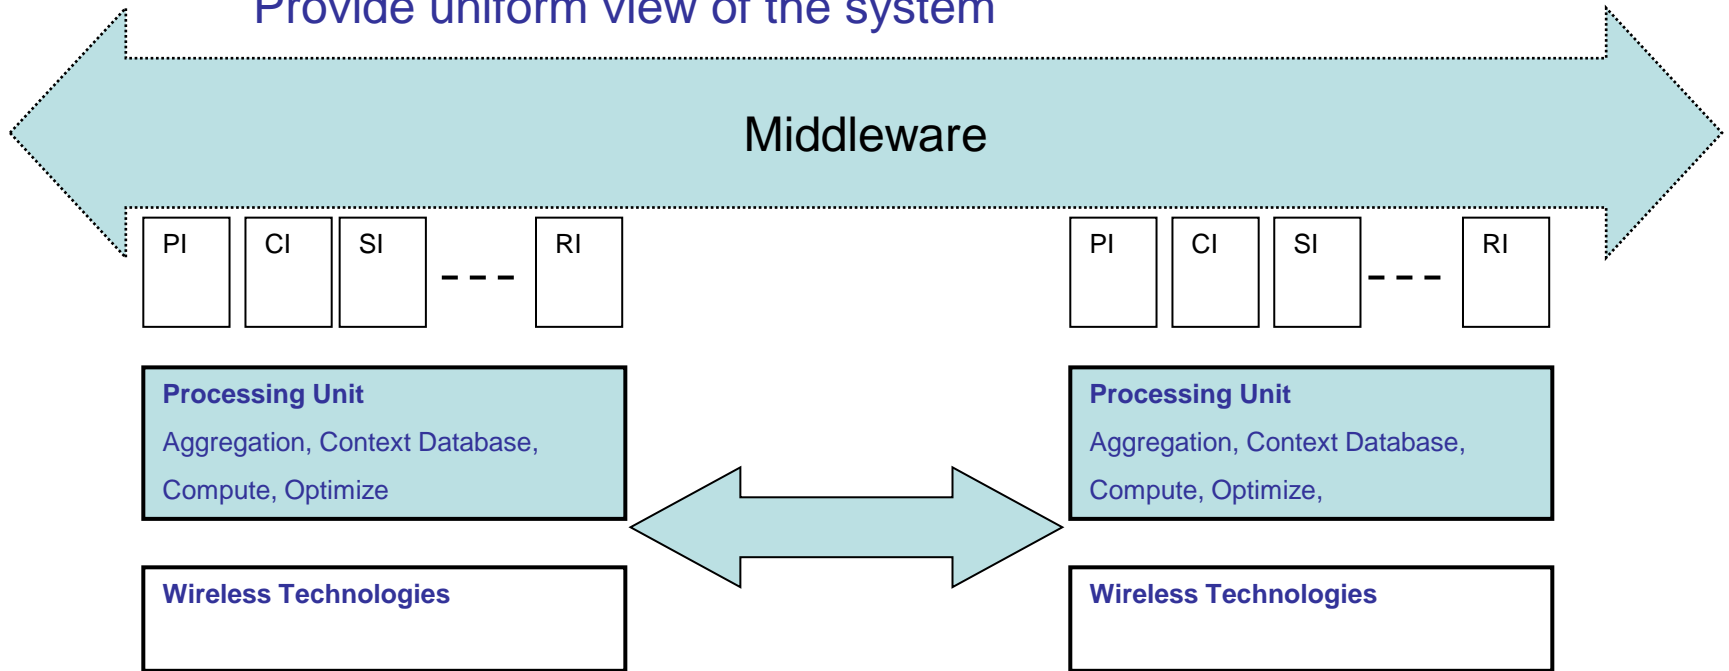

Legend: PI- ID, basic user and device information, CI- Content Index, SI – Service Index, RI – Reputation Index

Middleware services

Route packets

Perform services


Disseminate/acquire and find information

Identify malicious nodes

Find fastest path

Find multiple paths

Respond to queries

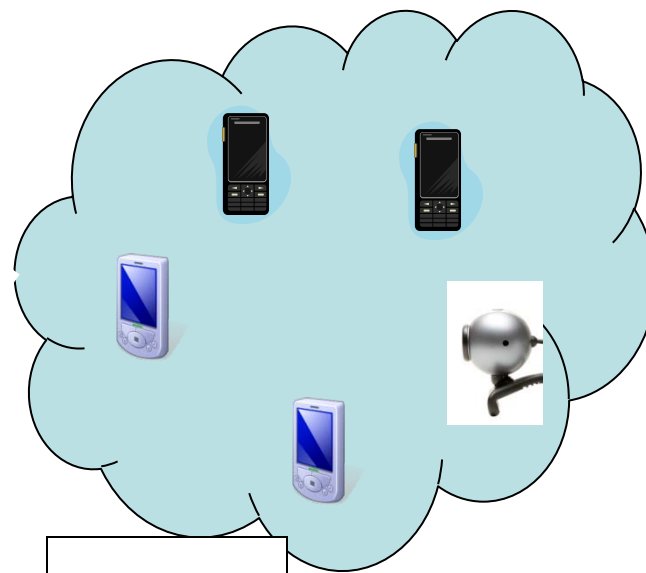

Challenge:
Trust?
Quality?
Reliable?



Content distribution and management

Lack of distinction between producers, consumers, and forwarders

Content generated anywhere anytime

- *Share, transmit*
- *Time to live and Hops to live limits*
- *Security, privacy and trust*

Limited buffer/cache space

- *How to acquire? What to store? Where to store? What to purge?*

Effective cache management strategies

- *Social group based*
- *Application based*
- *Consistency*

Query processing and management

- *Multiple queries*
- *Scalability*
- *Spatial and temporal consistency*



Information Caching

Store and forward data

- *Default*
- *Temporary data*
- *What to purge? and what to store?*

Acquisition

- *In house applications*
- *Social group applications*
- *Priorities*

Dissemination

- *Generated within node or social group*


Caching

- *Optimal management of limited cache space*
- *Data consistency*
- *Local cache and group cache*


Resource sharing

Application on PDA needs a video stream from camera

- *No direct link to camera*
- *Use cell phone as a forwarder*
 - Bluetooth connection between camera and cell phone
- *iPaQ PDA receives video stream and transmits processed stream to Blackberry*
 - Check authentication, process video stream

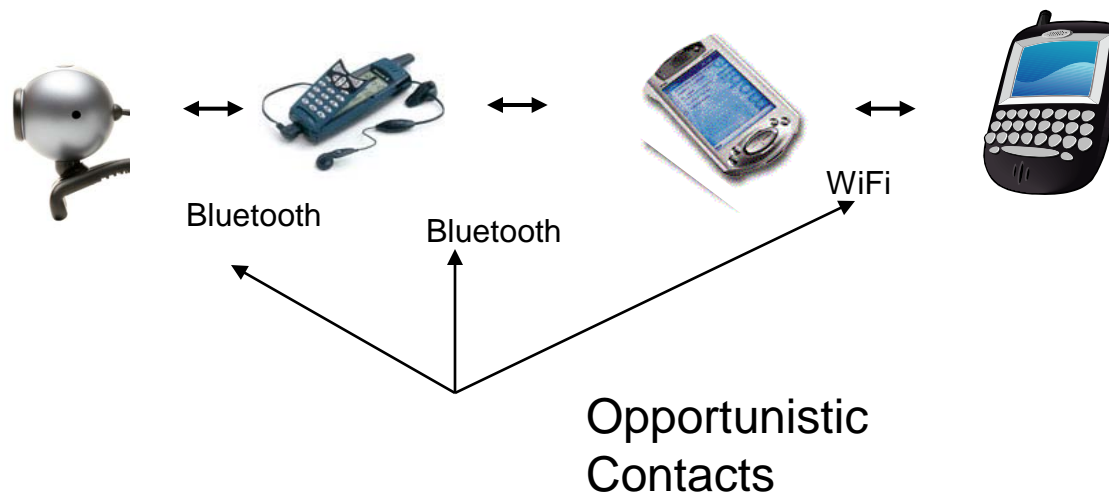


Query processing

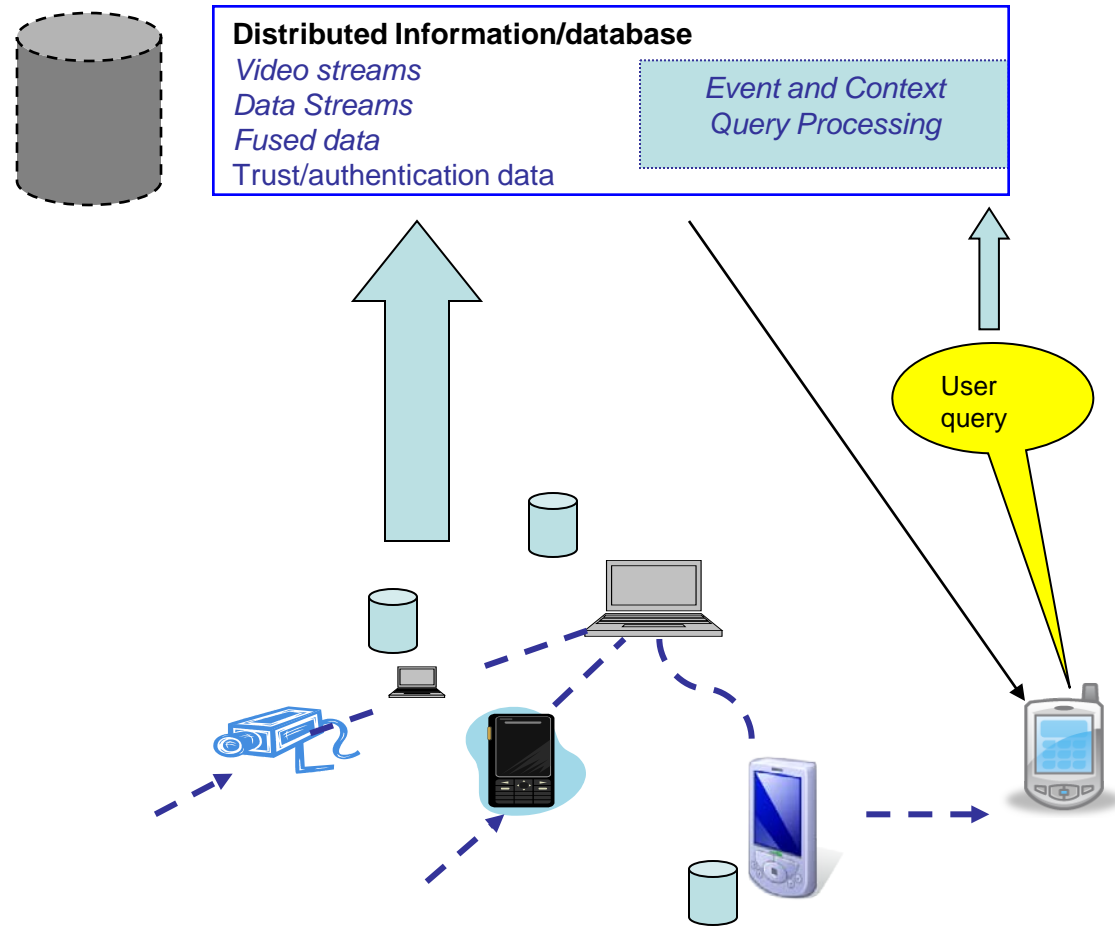


Challenge:
User mobility and
anonymity

Services and composition

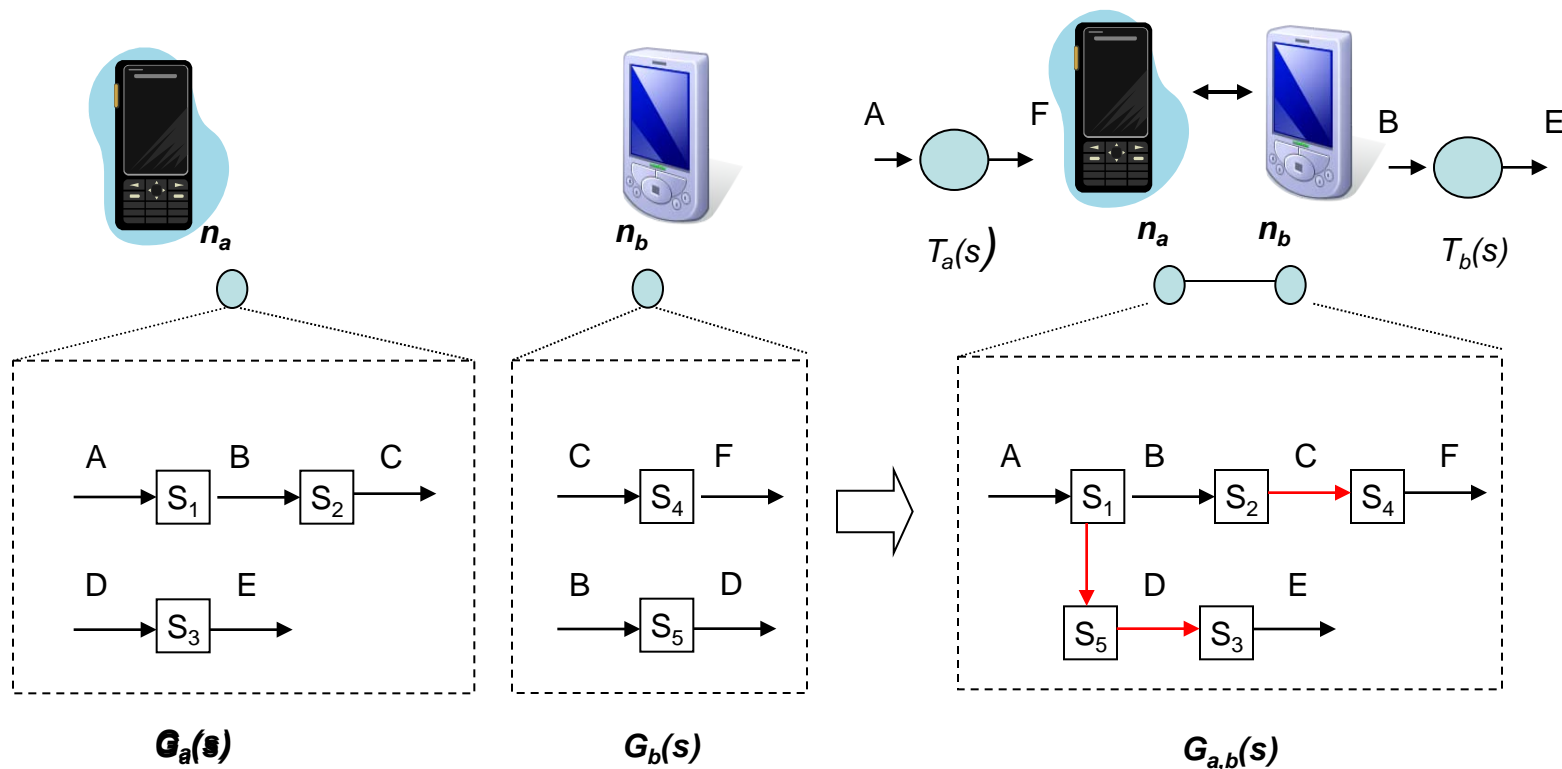

Service Composition - Example

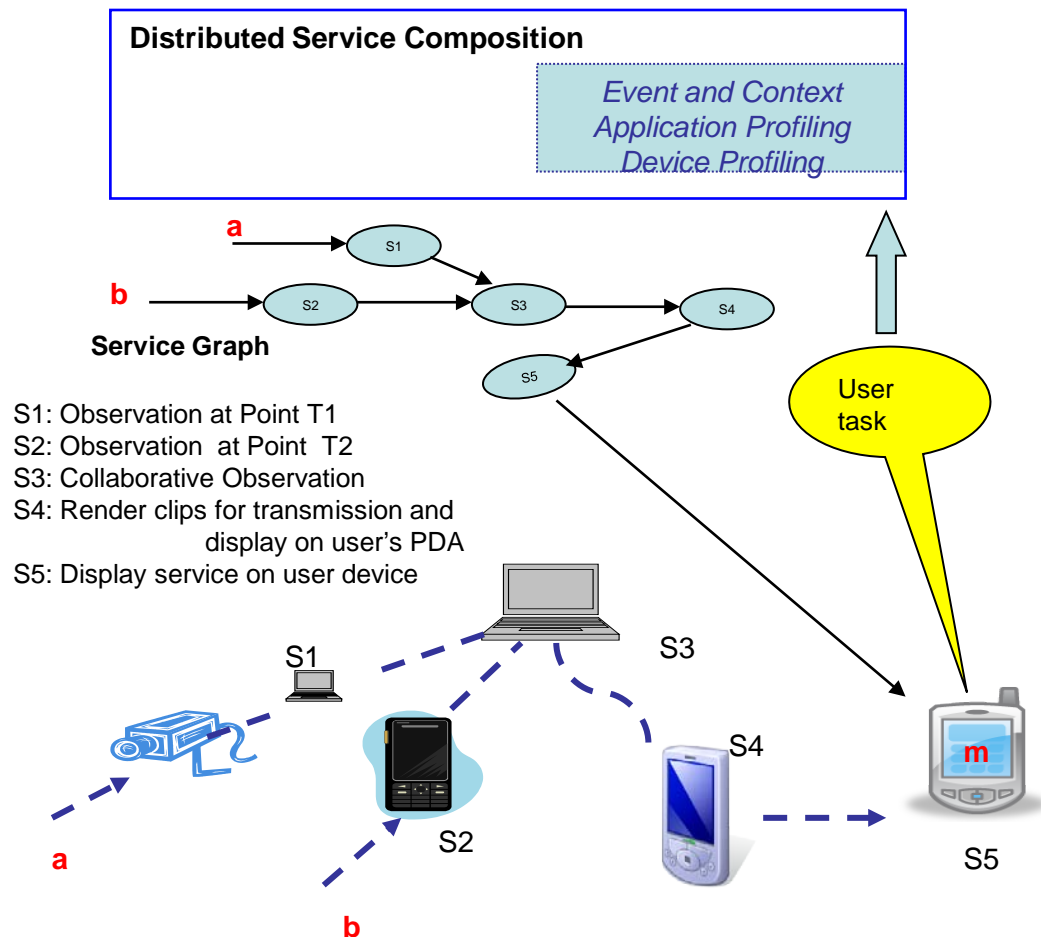

Challenge:
 Maintain incomplete
 and dynamically
 changing graphs



Trust, security and cooperation

Traditional schemes

- *Online trusted authorities*
- *Certificate repositories*
- *Eigen Trust*
 - Distributed tables

In social networks

- *Notion of trust fundamentally embedded in the environment*
- *Humanistic orientation to establish trust*
- *Social groups*

New models for trust

- *Social dynamics*
- *New definition for reputation*
 - Availability
 - Next contact

Mobile nodes as Data ferries



In situations where nodes are static

Provide *contacts* for information exchange and service provisioning

Data mules [?]

- *Helicopters fetch data from sensors*


Virtual observation of points of interest [Greenhill06,07]

Mobile Agents

Migrate from one node to another during contact

- *Carry input data and code*
- *Exploit resources at all visiting nodes*

Perform tasks and return with results

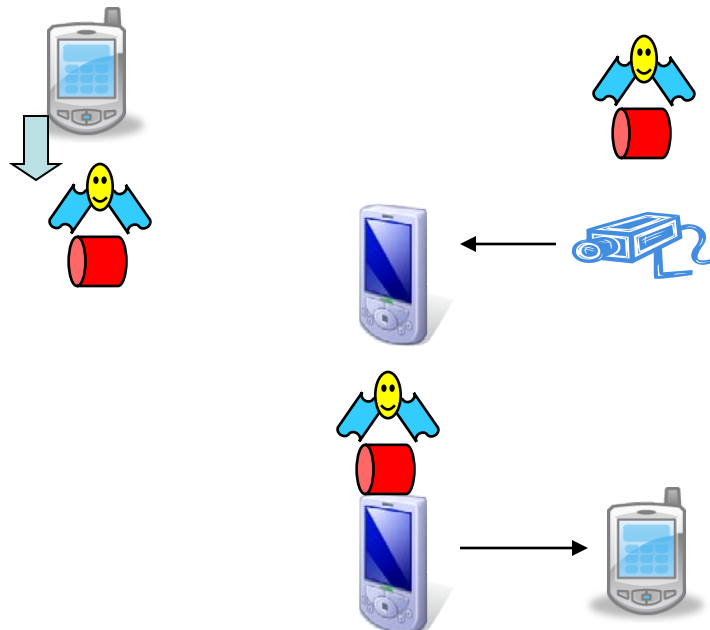

Challenge:
Security, latency



Mutual Exclusion

- Multiple nodes in a network need exclusive access to share resource.
- Critical section
- Properties:
 - Safety: At most one node must be executing its critical section at any given time
 - Liveness:
 - Freedom from starvation
 - Freedom from deadlock
 - Ordering




Proposed Algorithm

Mutual Exclusion for Opportunistic networks (MEOP)

- DAG based
- Reduced communication overhead
- Independent of routing algorithms
- Fault tolerant




MEOP

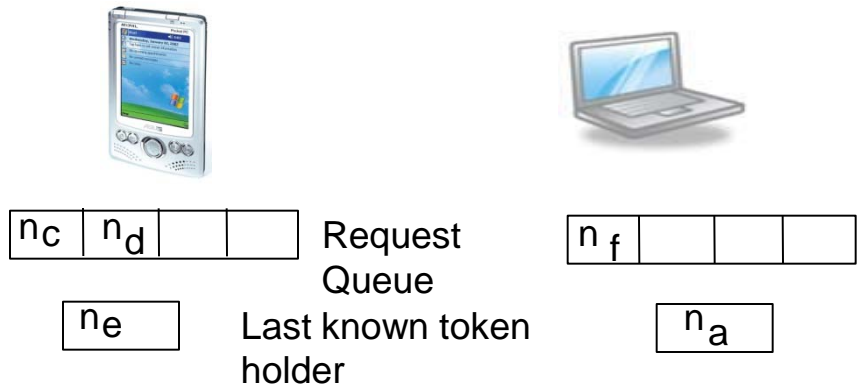

Request Generation

Request Propagation


Token Propagation

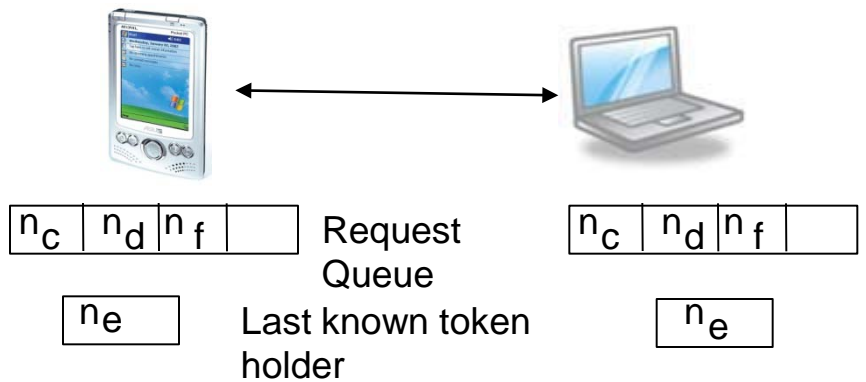

Fault Tolerance




MEOP: Example

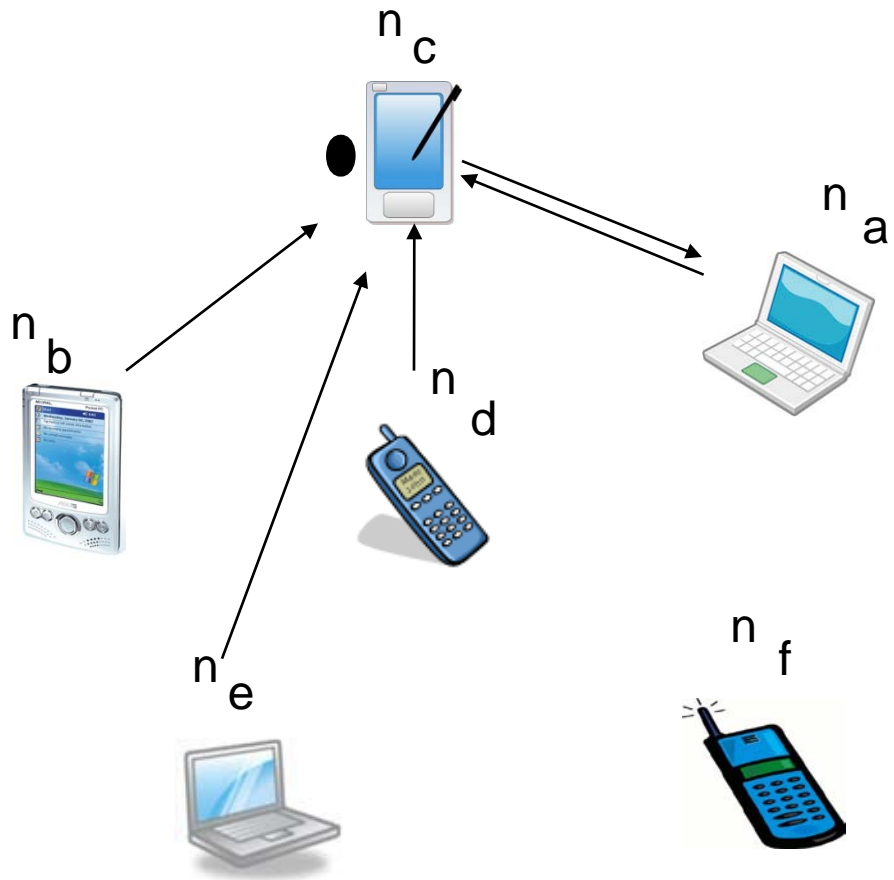




MEOP: Example

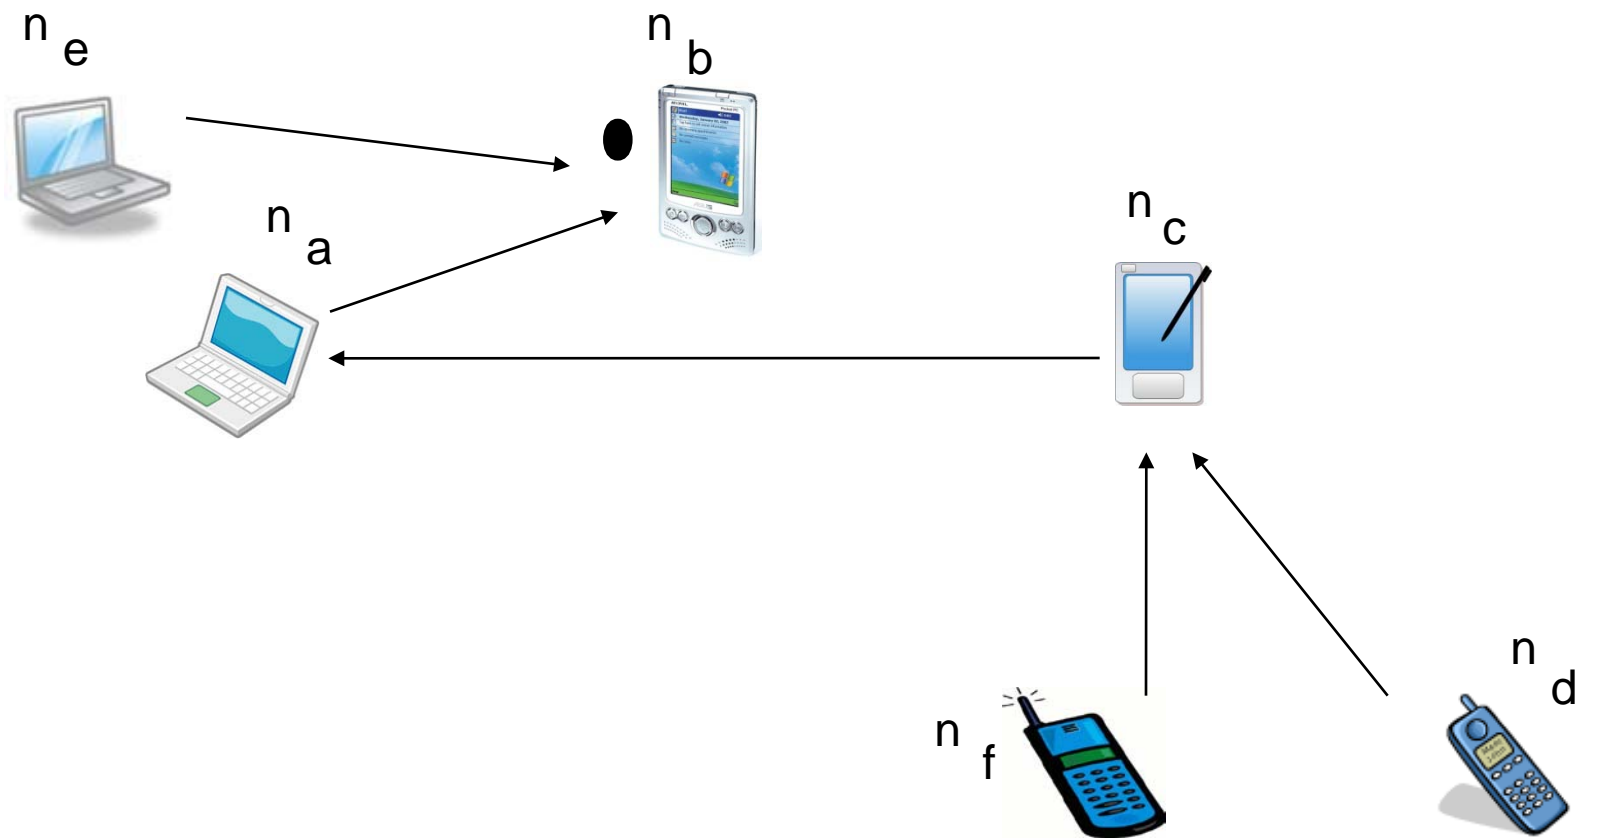



MEOP: Example

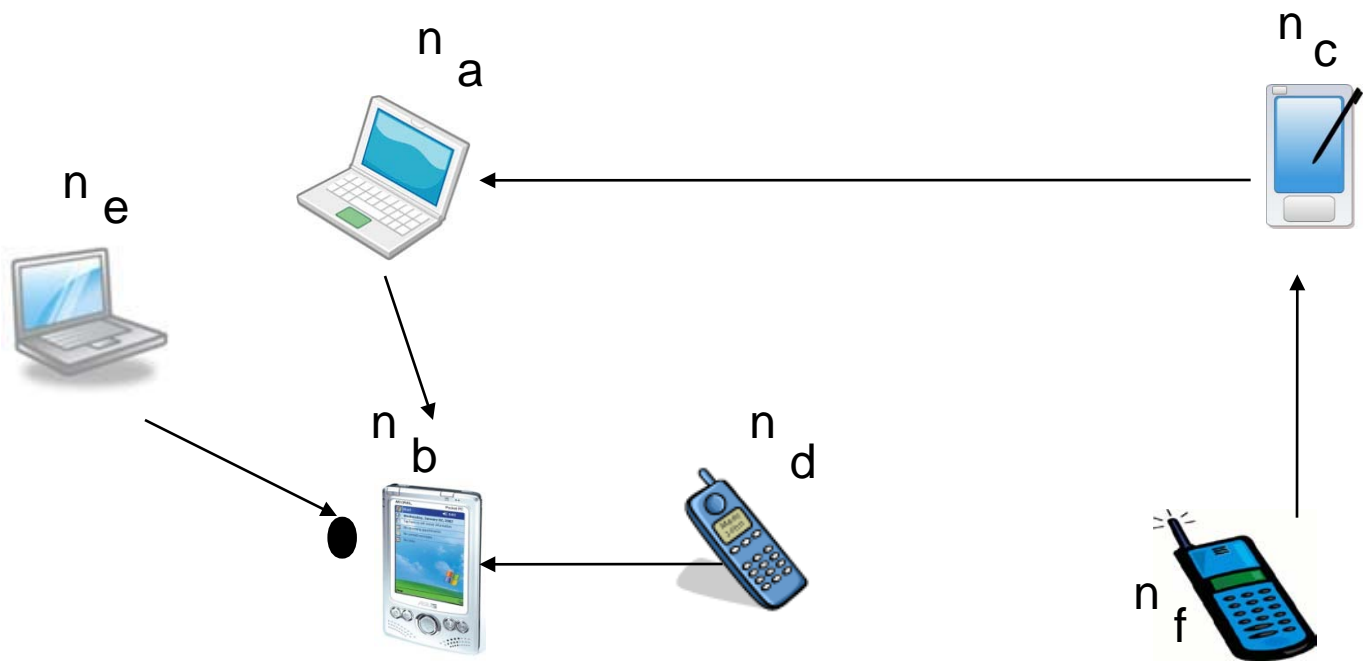



Data Diffusion: Problem Statement

To select suitable relays in order to send data across network using opportunistic contacts between mobile users in open environments

Challenges in realistic open environments (parks, streets in a city etc) include

- Delay Tolerance (order of few min to hours)
- Level of Connectivity (partial or sparse - varies with users, location and time)
- Mobility characteristics (some move around in larger space at faster speeds – more *diffusive* as compared to others)
- Changing user behavior (at different locations and times)
- Little interaction history (users may not have any social interaction before)
- Non-Repetitive location visits at smaller time scales





Applications

Transportation

Military

Health

- *Patient monitoring*


Crisis Management

Entertainment

Mobile Social networking

Marketing

Crisis Management

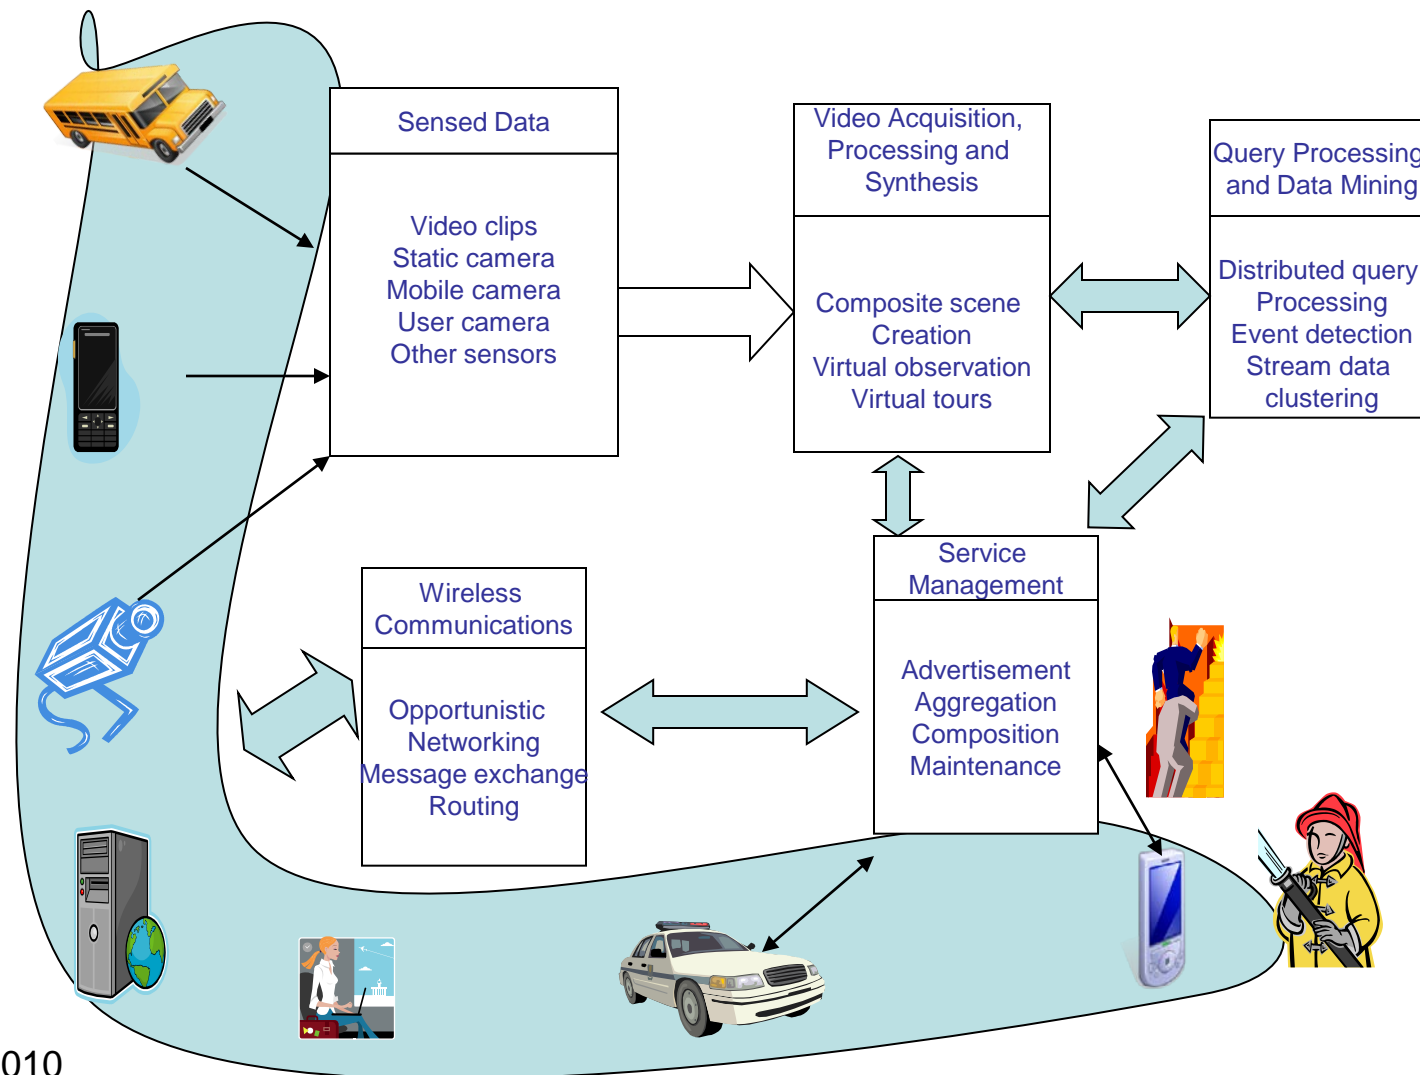



Conclusions

Distributed Computing on opportunistic networking platform will happen in the near future

Indeed, it is a great opportunity

Path to this goal has many challenges

- *Reliability*
- *Mobility*
- *Fault-tolerance*

Benefit Applications

- *Automatic highways*
- *Health care and preventive measures*
- *Unmanned operations*
- *Entertainment*
- *Crisis management*



Prior Work

Caching, info acquisition and dissemination

- *Optimization, consistency, mobile, distributed, pervasive, P2P*

Active networking in Mobile Environments

- *Mobile IP, buffering packets, split connections*
- *Overlay networks for better services*

Middleware services in Pervasive Systems

- *Creation, composition, maintenance*

Information Fusion

- *Sufficiency and Efficiency*

Data/information sharing in P2P systems

- *Cache optimizations, sharing benefits*



References

M. Conti and **M. Kumar**, Opportunities in Opportunistic Computing, IEEE Computer, Vol. 43, No. 1., Jan. 2010, pgs.42-50.

S. Tamhane and **M. Kumar**, ACM Workshop on Mobile and Opportunistic Networks (MobiOpp), Pisa, Italy, February 22-23, 2010.

C. Boldrini, M. Conti, and A. Passarella, HiBOP: History Based Routing Protocol for Opportunistic Networks, Proc. of the IEEE International Symposium on a World of Wireless Mobile and Multimedia Networks (WoWMoM 2007), Helsinki, Finland, June 18-21, 2007.

S. Burleigh, A. Hooke, L. Torgerson, K. Fall, V. Cerf, B. Durst, K. Scott and H. Weiss (2003) Delay-Tolerant Networking: An Approach to Interplanetary Internet, IEEE Communications Magazine, Vol 41 (6), pg 128-135, June, 2003.

M. Grossglauser and D. N.C. Tse, Mobility Increases the Capacity of Ad Hoc Wireless Networks, IEEE Trans. On Networking, VI. 10, No. 4, Aug. 2002.

S. Kalasapur, M. Kumar, and B. Shirazi, Dynamic Service Composition in Pervasive Computing Systems, IEEE Transactions on Parallel and Distributed Systems, Vol. 18, No. 7, July 2007, pgs. 907-918.

B.Lagesse and M. Kumar, A Novel Game Theoretic Security Mechanism for Mobile P2P Systems, Proc. of the Workshop on Mobile P2P networks, IEEE PerCom 2008.

A Lindgren, A Doria, O Schelen, [Probabilistic routing in intermittently connected networks](#), ACM SIGMOBILE Mobile Computing and Communications Review, 7(13): 19-20, July 2003.



References

L. Pelusi, A. Pasarella, and M. Conti, "Opportunistic Networking: Data forwarding in disconnected mobile ad hoc networks, IEEE Communications Magazine, 44 (11), Nov. 2006.

Vahdat and D. Becker Epidemic Routing for Partially-Connected Ad Hoc Networks Department of Computer Science Duke University Durham, NC, 2000.

E. Yoneki, P. Hui and J. Crowcroft, Visualizing Community Detection in Opportunistic Networks, CHANTS'07, Sep, 07, Montreal, Canada.

Ling-Jyh Chen, Chen-Hung Yu, Tony Sun, Yung-Chih Chen, Hao-Hua Chu, "A Hybrid Routing Approach for Opportunistic Networks", SIGCOMM'06 Workshops, September 11-15 2006, Pisa, Italy.

Ram Ramanathan, Richard Hansen, Prithwish Basu, Regina Rosales-Hain, Rajesh Krishnan, "Prioritized Epidemic Routing for Opportunistic Networks", MobiOpp '07, June 11, 2007, San Juan, Puerto Rico, USA.

Scott Burleigh, Adrian Hooke, Leigh Torgerson, Kevin Fall, Vint Cerf, Bob Durst, Keith Scott, Howard Weiss, "Delay-Tolerant Networking: An Approach to Interplanetary Internet", IEEE Communications Magazine, June 2003, pp. 128-136.

Feiselina Tan, Sebastien Ardon, Robert Hsieh, "Impact of User Mobility Patterns on Opportunistic Content Distribution Network", IEEE, ICON 2007, pp. 365-370.

Peng Yang, Mooi Choo Chuah, "Context Aware Multicast Routing Scheme for Disruption Tolerant Networks", PE-WASUN'06, October 6, 2006, Torremolinos, Malaga Spain, pp. 66-73.



Projects

- Sharing Information through Publish/Subscribe methods in Opportunistic Networks
- Caching and Pre-fetching Information in Opportunistic Networks
- Service Execution in Opportunistic Networks
- Resource Management in Sensor Systems